

# PARAGON TK-3200 SERIES

32" Interactive Kiosk

## *Serve Up Quality, Efficiency & Value*

- Stylish, Modern, and Built for Intuitive Interactive Use
- Versatile Transaction Functionality
- Modular for Easy Serviceability
- Flexible Configuration



COMPLETE SELF-SERVICE SOLUTIONS  
TEL: +49 8152 3962500 OR VISIT US ONLINE AT [WWW.KIOSK.EU](http://WWW.KIOSK.EU)

 **KIOSK**<sup>®</sup>  
Information Systems



## PARAGON TK-3200 SERIES



Packed with functionality and convenience in an appealing design, the **Paragon TK-3200 Series** is a 32" interactive kiosk that is suited for retail stores, quick service and fast casual restaurants. It serves as a seamless extension of the existing POS terminals, helping to drive sales during peak times, and provide efficient order and payment flow.

### STYLISH, MODERN, AND BUILT FOR INTUITIVE INTERACTIVE USE

Designed with both functionality and aesthetics in mind, the Paragon TK-3200 Series features a bright, high definition 32" PCAP touch screen within a sleek, durable enclosure, providing a contemporary and sophisticated automated user interface.

### VERSATILE FUNCTIONALITIES

Incorporating a wide range of peripherals in self-service applications including 2D scanner, receipt printer, NFC, status indicator, bracket for EMV payment devices, and more.

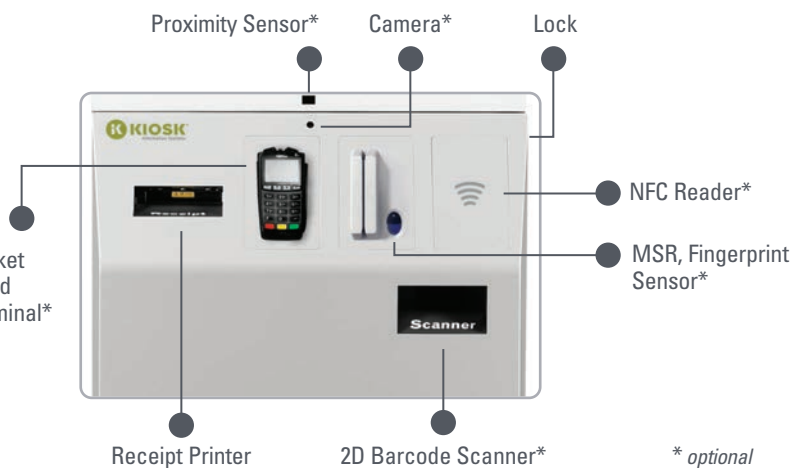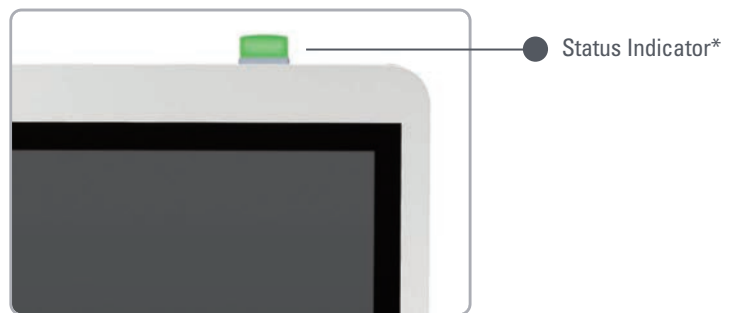

\* optional




**MODULAR FOR EASY SERVICEABILITY**

Modular design makes installation, maintenance and component replacement easy, fast and convenient, and speeds up the return on investment by reducing repair cost.

**FLEXIBLE CONFIGURATION**

Mounting options include wall mount, single or dual sided pedestal operation, allowing for flexible deployment.

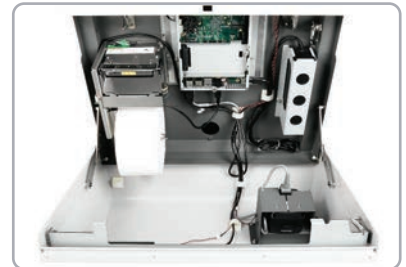

Wall Mount



Single Sided Operation



Dual Sided Operation

# PARAGON TK-3200 SERIES

Specification	TK-3230	TK-3250
Processor	Intel Bay Trail J1900, Quad Core, up to 2.42 GHz, 2M Cache	Intel Skylake Core i3-7100U, Dual Core, 2.40 GHz, 3M cache
System Memory	DDR3L SO-DIMM slot x 1, max. 8 GB	DDR4 SO-DIMM slot x 2, max. 16 GB
Storage Device	SATA SSD x 1	
Power Supply	12V / 150W	
OS Support	Win 7 / POSReady 7 / WE 8.1 Industry / Win 10 IoT	Win 10 IoT 64 bit
LAN Port	10 / 100 / 1000 Mb x 1	
Audio	Internal 3W speaker x 2	
Internal Expansion Slot	M.2 x 1	
Built-in Proximity Sensor	Range from 600 mm to 1000 mm	
Built-in Camera	1MP wide angle camera	
Built-in Printer	3" open frame printer with auto cutter, 250 mm / sec (max.)	

Display & Touch		
LCD	32"	
Resolution	1920 x 1080	
Touch	True-flat PCAP touch with multi-touch support	

Physical Dimension		
Dimension (H x W x D in millimeters)	Main unit: 1193.8 x 508 x 203.2 With stand: 1879.6 x 609.6 x 609.6	
Weight (in kilograms)	Main unit: 28.12 With stand: 61.23	

Environmental		
Operating Condition	0°C - 50°C, 20%RH - 90%RH (Equipped with SSD)	
Storage Condition	-20°C - 70°C, 10%RH - 90%RH	

Built-in Options		
WiFi	M.2 WiFi / BT module	
Scanner	2D barcode scanner	
EMV Payment Device Bracket Support	Custom bracket support for various EMV payment devices	
MSR	3 tracks ISO or JISII (HID / VCOM selection)	
Fingerprint Sensor	Optical type	
NFC Reader	Support ISO / IEC 14443-A&B (MIFARE), JIS x 6319-4 (Felica), ISO / IEC 15693, NFC protocols - tag read / write (ISO / IEC-18902)	
Status Indicator	3-color LED indicator	

\*The product information and specifications are subject to change without prior notice.